



TECNOLOGIA & SOLUZIONI

Crane Scale

- ◆ Portable and compacted structure
- ◆ Easy and convenient operation
- ◆ Stable and reliable reading

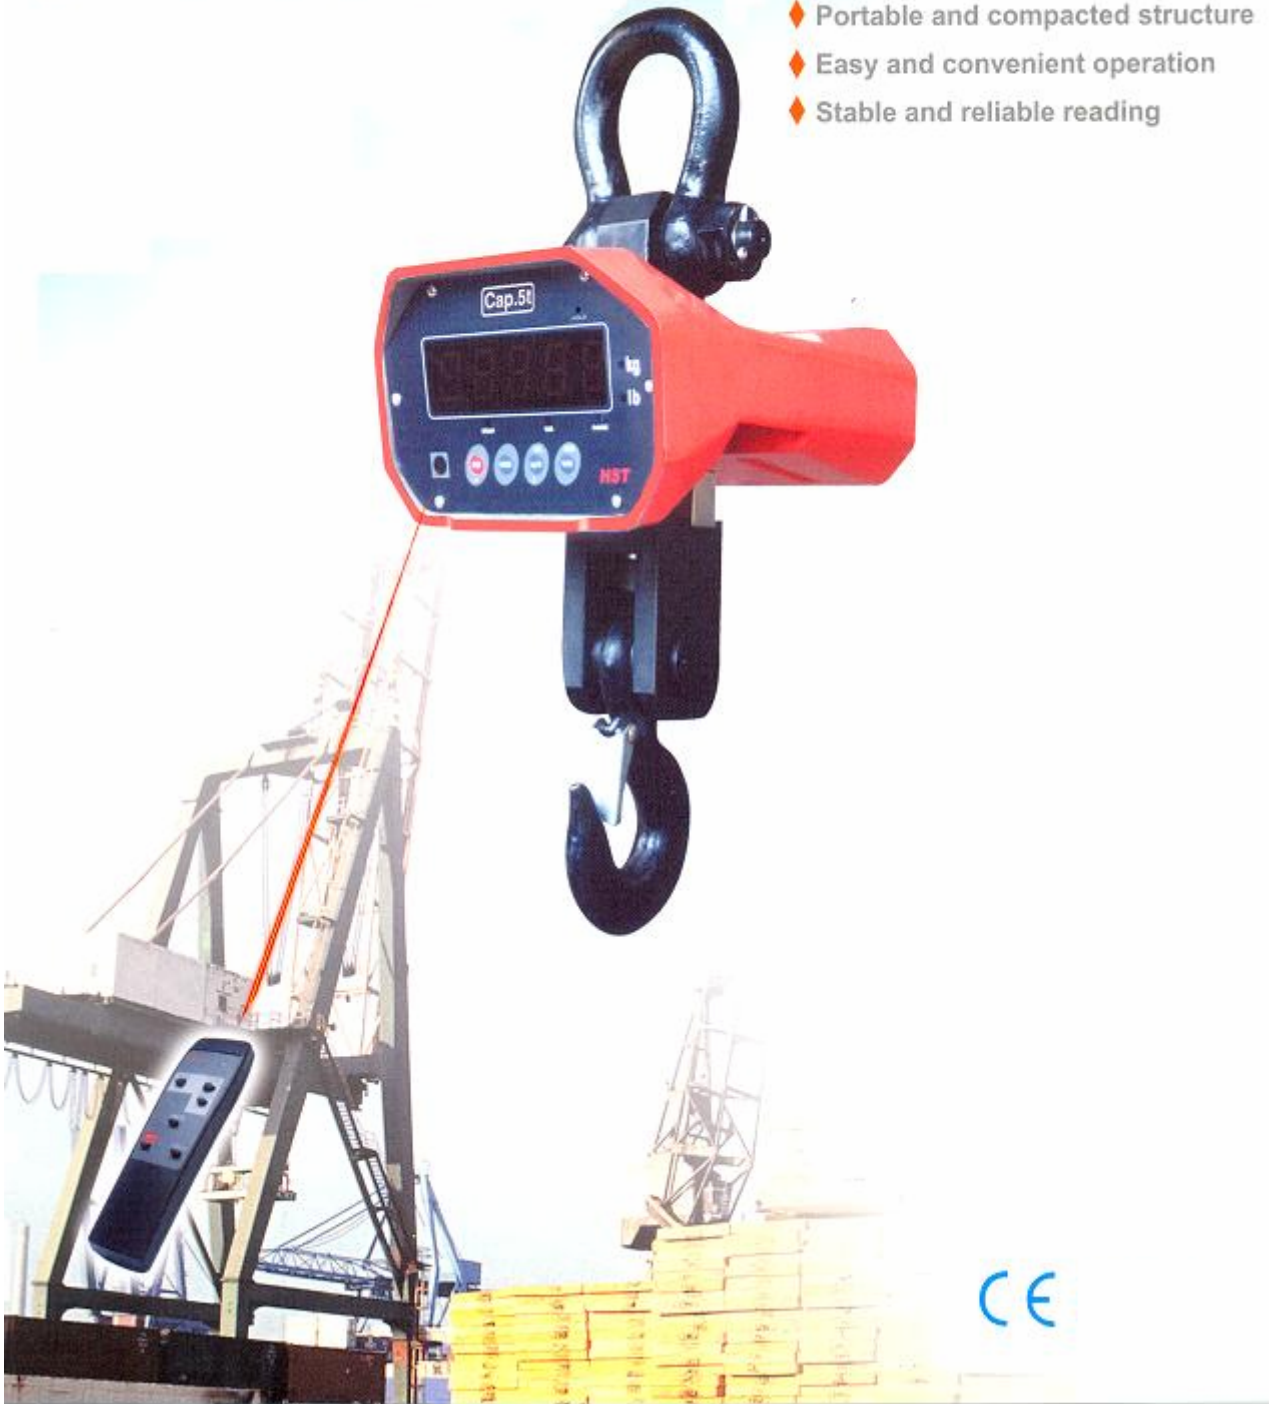

TECNOLOGIA & SOLUZIONI

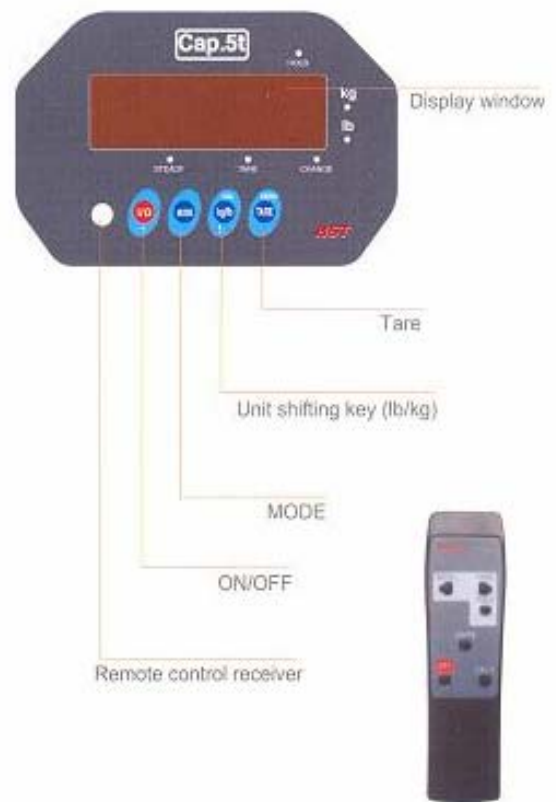

Technical parameters

Accuracy class	OIML (III)
Deducting tare range	100% F+S
Reading stability time	≤ 10 second
Over load alarming value	100% F+S+9e
Max. Safe load	125% F+S
Ultimate load	300% F+S
Power supply	Full sealed free-maintenance rechargeable battery 6V/8.5AH
Operation temperature range	-10°C ~ +40°C
Humidity range	20°C ≤ 90%RH
Continuous working time	≥80 hours

Model	Max.Cap.	Min. Cap.	Division value	Division Number
ZCS-0.5t	500	4	0.2	2500
ZCS-1t	1000	10	0.5	2000
ZCS-2t	2000	20	1	2000
ZCS-3t	3000	20	1	3000
ZCS-5t	5000	40	2	2500
ZCS-7.5t	7500	100	5	1500
ZCS-10t	10000	100	5	2000
ZCS-15t	15000	100	5	3000
ZCS-20t	20000	200	10	2000

OCS Series wire less Remote Crane Scale



K Series Heat-insulated Crane Scale

